

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT


Client : Flooring Oddz and Endz Unit 2/73 Prestige Parade Wangara WA 6065

 Test Number
 :
 23-004498

 Issue Date
 :
 1/12/2023

 Print Date
 :
 1/12/2023

| Sample Description | Clients Ref : "SM Range" |
|--------------------|--|
| | Loop pile carpet tile |
| | End Use : Flooring |
| | Nominal Composition : Nylon with PVC backing |
| | Nominal Mass per Unit Area/Density : 500g/m2 |
| | Nominal Thickness : 6mm |

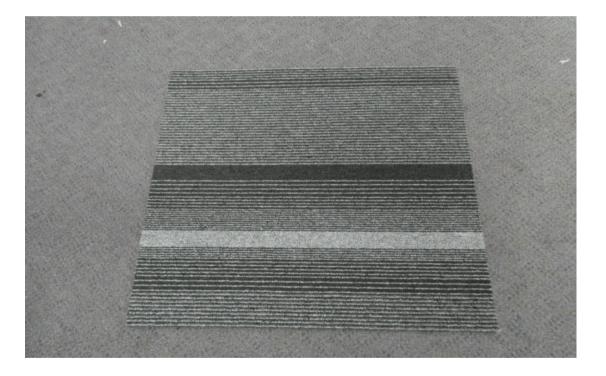

310637

67624

C Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Deld

Fiona McDonald



Page 1 of 3

AICHAEL A. JACKSON B.Sc.(Hons)

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

| Client : | Flooring Oddz and Endz | Test Number | : | 23-004498 |
|----------|---------------------------|-------------|---|-----------|
| | Unit 2/73 Prestige Parade | Issue Date | : | 1/12/2023 |
| | Wangara WA 6065 | Print Date | : | 1/12/2023 |
| | | | | |

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

| Date of Sample Arrival | | 03-11-20 | 23 | | |
|------------------------|-----|----------|-----|------|-------|
| Date Tested | | 01-12-20 | 23 | | |
| CHF Value | 1 | 2 | 3 | Mean | |
| Length | 6.6 | - | - | - | kW/m² |
| Width | 6.2 | 6.0 | 4.9 | 5.7 | kW/m² |
| HF-30 Value | 1 | 2 | 3 | Mean | |
| Width | - | - | 5.6 | - | kW/m² |
| Smoke Value | 1 | 2 | 3 | Mean | |
| Length | 109 | - | - | - | %.min |
| Width | 141 | 106 | 129 | 125 | %.min |
| | | | | | |

310637

67624

C Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

held

Fiona McDonald





MICHAEL A. JACKSON B.Sc.(Hons)



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client : Flooring Oddz and Endz Unit 2/73 Prestige Parade Wangara WA 6065

| Test Number | : | 23-004498 |
|-------------|---|-----------|
| Issue Date | : | 1/12/2023 |
| Print Date | : | 1/12/2023 |

Observations: Melting

Yes

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

310637

67624

C Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Fiona McDonald





Page 3 of 3

AIOHAEL A. JACKSON B.Sc.(Hons)